

Rustfrit/forzinket stål - Rostfreier/verzinkter Stahl
Rostfritt/förzinkat stål - Stainless/zincd steel

- DK


Spændebånd
Bånd: Rustfrit stål, bredde 8 mm, perforeret, (DIN 1.4310/AISI 301).
Hus: Rustfrit stål, (DIN 1.4310/AISI 301).
Skrue: Galvaniseret stål, sekskantet med kærøv 1/4"/6,3 mm, (DIN 1.0453/AISI 1018).
Tilspændingsmoment: Rekommenderet 1,7 Nm, 15 in-lbs
- D

Schlauchschellen
Band: Rostfreier Stahl, Breite 8 mm, perforiert, (DIN 1.4310/AISI 301).
Gehäuse: Rostfreier Stahl, (DIN 1.4310/AISI 301).
Schraube: Galvanisierte Sechskant-Schraube mit Kerbe 1/4"/6,3 mm, (DIN 1.0453/AISI 1018).
Anziehmoment: Richtwert 1,7 Nm, 15 in-lbs
- S

Slangklammer
Band: Rostfritt stål, bredd 8 mm, perforerat, (DIN 1.4310/AISI 301).
Hus: Rostfritt stål, (DIN 1.4310/AISI 301).
Skruv: Galvaniserat stål, sexkant 1/4"/6,3 mm med spår, (DIN 1.0453/AISI 1018).
Åtdragningsmoment: Rekommenderat 1,7 Nm, 15 in-lbs
- GB

Gear clamps
Band: Stainless steel, width 8 mm, perforated, (DIN 1.4310/AISI 301).
House: Stainless steel, (DIN 1.4310/AISI 301).
Screw: Galvanized steel, 1/4"/6,3 mm slotted hexagon, (DIN 1.0453/AISI 1018).
Torque: Recommended 1,7 Nm, 15 in-lbs

Art.-Nr.	Ø mm – min	Ø mm - max
9021812	6	16
9021813	8	22

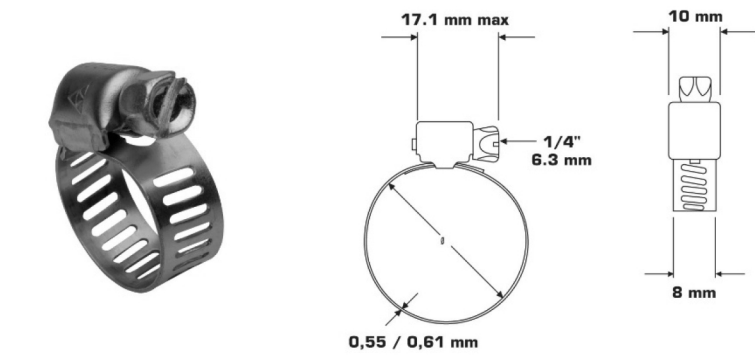

Serie 2611 type HS
DIN 3017 W2

Rustfrit forzinket stål - Rostfreier/verzinkter Stahl
Sainless/zincd steel - Rostfritt/förzinkat stål

- DK

Spændebånd
Bånd: Rustfrit stål, bredde 12,7 mm, perforeret, (DIN 1.4310/AISI 301).
Hus: Rustfrit stål, (DIN 1.4310/AISI 301).
Skrue: Galvaniseret stål, sekskantet med kærøv 5/16"/8 mm, (DIN 1.0453/AISI 1018).
Tilspændingsmoment: Rekommenderet 4,5 Nm, 40 in-lbs
- D

Schlauchschellen
Band: Rostfreier Stahl, Breite 12,7 mm, perforiert, (DIN 1.4310/AISI 301).
Gehäuse: Rostfreier Stahl, (DIN 1.4310/AISI 301).
Schraube: Galvanisierte Sechskant-Schraube mit Kerbe 5/16"/8 mm, (DIN 1.0453/AISI 1018).
Anziehmoment: Richtwert 4,5 Nm, 40 in-lbs
- S

Slangklammer
Band: Rostfritt stål, bredd 12,7 mm, perforerat, (DIN 1.4310/AISI 301).
Hus: Rostfritt stål, (DIN 1.4310/AISI 301).
Skruv: Galvaniserat stål, sexkant 5/16"/8 mm med spår, (DIN 1.0453/AISI 1018).
Åtdragningsmoment: Rekommenderat 4,5 Nm, 40 in-lbs
- GB

Gear clamps
Band: Stainless steel, width 12,7 mm, perforated, (DIN 1.4310/AISI 301).
House: Stainless steel, (DIN 1.4310/AISI 301).
Screw: Galvanized steel, 5/16"/8 mm slotted hexagon, (DIN 1.0453/AISI 1018).
Torque: Recommended 4,5 Nm, 40 in-lbs

Art.-Nr.	Ø mm – min	Ø mm - max
9021811	11	25
9021800	14	27
9021801	14	32
9021802	18	38
9021803	19	44
9021804	27	51
9021805	33	57
9021806	40	64
9021808	52	76
9021809	59	83
9021810	64	114

